

IPHBL3-2812-W

3MP OUTDOOR IR DAY/NIGHT
BULLET IP CAMERA



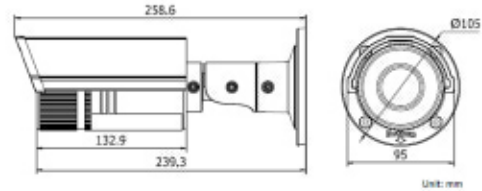


FEATURES

- 20FPS @ 3MP (2688 x 1520)
- 2.8-12mm Varifocal Lens
- H.264 / MJPEG
- IR Range up to 100'
- DWDR, DNR, Day/Night
- Outdoor IP66
- 12VDC, PoE
- Available in White

Rainvision is a leading brand of HD and IP network video surveillance cameras and recording equipment. By utilizing the latest technology in the industry, Rainvision video surveillance cameras provide all of the crisp, clear image quality in any security application or environment. With incorporating the latest ONVIF Profile S standards, Rainvision allows for easy integration and interoperability.

SPECIFICATIONS

CAMERA		NETWORK	
Image Sensor	1/3" Progressive Scan CMOS	Network Storage	micro SD/SDHC/SDXC card (64Gb) local storage, NAS
Min. Illumination	0.07Lux @ F1.2, AGC ON, 0 Lux with IR	Alarm Trigger	Motion Detection, Tampering alarm, Network Disconnect, IP Address Conflict, Storage Full, Storage Error
Shutter Speed	1/25s (1/30s) to 1/100,000s	Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
Lens	2.8-12mm @ f/1.4	General Standard Interface	User Authentication, Watermark, Dual Stream ONVIF, PSIA, CGI, ISAPI 1 RJ45 10M / 100M Ethernet Interface
Lens Mount	Φ14	GENERAL	
Day & Night	IR Cut Filter	Operating Conditions	-22 °F ~ 140 °F, Humidity 95% or less (non-condensing)
IR Range	100'	Power Requirement	DC12V ± 10%, PoE (802.3af)
DNR	3D DNR	Power Consumption	Max. 5.5W (Max. 7.5W with IR on)
WDR	Digital WDR	Ingress Protection	IP66
3-axis Angle Adjustment	Yes	Dimensions	3.74" x 4.13" x 10.19"
COMPRESSION STANDARD		Weight	2.65 lbs
Video Compression	H.264 / MJPEG	Warranty	3 Years
Type	Main Profile H.264	Package Contents	Camera, Installation CD/Manual/Template, Mounting Screws, Weathertight Connector
Video Bit Rate	32 Kbps ~ 16 Mbps		
Dual streams	Support		
Audio Compression	G.711 / G.726 / MP2L2		
Audio	64Kbps (G.711) / 16Kbps (G.726) / 32-128 Kbps (MP2L2)		
IMAGE			
Max. Resolution	2048 x 1536		
Frame Rate	50Hz: 20FPS @ 2048 x 1536, 25FPS @ 1920 x 1080, 25FPS @ 1280 x 720, 60Hz: 20FPS @ 2048 x 1536, 30FPS @ 1920 x 1080, 30FPS @ 1280 x 720		
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness Adjustable by Client Software or Web Browser		
BLC	Support		
ROI Codec	Support, Up to 4 Configurable Areas		
ACCESSORIES			
Junction Box JB200	Pole Mount POLEMT5		
			
		 <p>Unit: mm</p>	