



IPHVD4-3-W

4MP OUTDOOR IR DAY/NIGHT
RUGGED DOME IP CAMERA

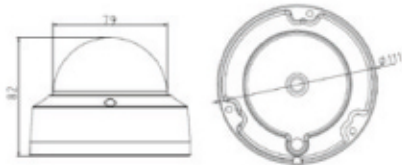


FEATURES

- 20FPS @ 4MP (2688 x 1520)
- 2.8mm Fixed Lens
- H.264+ / H.264 / MJPEG
- IR Range up to 100'
- WDR, DNR, Day/Night
- Outdoor IP66, Vandal-proof IK10
- 12VDC, PoE
- Available in White

Rainvision is a leading brand of HD and IP network video surveillance cameras and recording equipment. By utilizing the latest technology in the industry, Rainvision video surveillance cameras provide all of the crisp, clear image quality in any security application or environment. With incorporating the latest ONVIF Profile S standards, Rainvision allows for easy integration and interoperability.

SPECIFICATIONS

CAMERA		NETWORK	
Image Sensor	1/3" Progressive Scan CMOS	Network Storage	NAS (Support NFS,SMB/CIFS), ANR
Min. Illumination	0.01Lux @ F1.2, AGC ON, 0 Lux with IR	Alarm Trigger	Intrusion Detection, Line Crossing Detection, Motion Detection, Dynamic Analysis, Tampering Alarm, Network Disconnect, IP Address Conflict, Storage Exception
Shutter Speed	1/3s to 1/10,000s	Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
Lens	2.8mm f/2.0		One-key Reset, Flash-prevention, Mirror, Dual Stream, Heartbeat, Password Protection, Privacy Mask, Watermark, IP Address Filtering, Anonymous Access
Lens Mount	M12		ONVIF (Profile S, Profile G), PSIA, CGI, ISAPI
Day & Night	IR cut filter with auto switch	General	1 RJ45 10M / 100M Ethernet Interface
IR Range	100'		
DNR	3D DNR		
WDR	120dB		
3-axis Angle Adjustment	Pan: 0°~355°, Tilt: 0°~75°, Rotation: 0°~355°		
COMPRESSION STANDARD		GENERAL	
Video Compression	H.264+ / H.264 / MJPEG	Operating Conditions	-22 °F ~ 140 °F, Humidity 95% or less (non-condensing)
Type	Main Profile H.264	Power Requirement	DC12V ± 10%, PoE (802.3af)
Video Bit Rate	32 Kbps ~ 16 Mbps	Power Consumption	Max. 5W
Dual streams	Support	Ingress Protection	IP66
IMAGE		Impact Protection	IK10
Max. Resolution	2688 x 1520	Dimensions	4.4" x 3.2"
Frame Rate	50Hz: 20FPS @ 2688 x 1520, 25FPS @ 1920 x 1080, 25FPS @ 1280 x 720, 60Hz: 20FPS @ 2688 x 1520, 30FPS @ 1920 x 1080, 30FPS @ 1280 x 720	Weight	1.1 lbs
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness Adjustable by Client Software or Web Browser	Warranty	3 Years
	Support, Zone configurable	Package Contents	Camera, Installation CD/Manual/Template, Mounting Screws, Weathertight Connector
BLC	Support		
ROI Codec	Support		
ACCESSORIES			
Junction Box JB250	Wall Mount WM210	Wall Mount WM215	Wall Mount WM215BB with Back Box
Pole Mount POLEMT5			
			



RainVision

www.rainvision.com ♦ 1 Enterprise Place Hicksville NY 11801 ♦ (516) 933-4900