



IPHBL4-4-W

4MP OUTDOOR IR DAY/NIGHT BULLET IP CAMERA

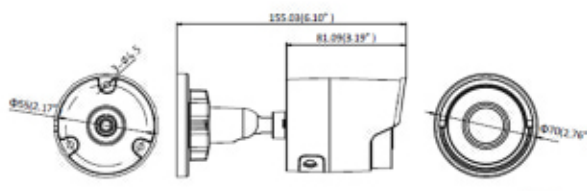




FEATURES

- 20FPS @ 4MP (2688 x 1520)
- 4mm Fixed Lens
- H.264 / MJPEG
- IR Range up to 100'
- DWDR, DNR, Day/Night
- Outdoor IP66
- 12VDC, PoE
- Available in White

Rainvision is a leading brand of HD and IP network video surveillance cameras and recording equipment. By utilizing the latest technology in the industry, Rainvision video surveillance cameras provide all of the crisp, clear image quality in any security application or environment. With incorporating the latest ONVIF Profile S standards, Rainvision allows for easy integration and interoperability.

SPECIFICATIONS

CAMERA		NETWORK	
Image Sensor	1/3" Progressive Scan CMOS	Network Storage	NAS, Video Upload to PC
Min. Illumination	0.07Lux @ F1.2, AGC ON, 0 Lux with IR IR May be Disabled in OSD	Alarm Trigger	Intelligent Video Motion Detection, Video Loss, Tampering
Shutter Speed	1/3s to 1/10,000s	Protocols	IPv4, IPv6, HTTP, TCP/IP, ICMP, DHCP, DNS, DDNS, RTP, RSTP, RTCP, uPnP, IGMP, PPPoE, SMTP, NTP, SNMP, HTTPS, FTP, 802.1X, QoS, Bonjour
Lens	4mm	General	Multiple User Access Levels with Password Protection, Watermark
Day & Night	IR Cut Filter, Controllable by Light Sensor or via Schedule	Standard Interface	ONVIF, PSIA, CGI, ISAPI 8P/8C RJ-45F for Network and PoE Power
IR Range	100'	GENERAL	
DNR	3D DNR, Off/On, Level Adjust	Operating Conditions	-22 °F ~ 140 °F,
WDR	Dynamic WDR	Power Requirement	DC12V ± 10%, PoE (802.3af)
3-axis Angle Adjustment	Yes	Power Consumption	Max. 5W (Max. 7W with IR on)
COMPRESSION STANDARD		Ingress Protection	IP66
Video Compression	H.264 / MJPEG	Dimensions	2.4" x 3.0" x 5.5"
Type	Main Profile H.264	Weight	1.1 lbs
Video Bit Rate	32 Kbps ~ 12,288 Kbps	Warranty	3 Years
Dual streams	Support	Package Contents	Camera, Installation CD/Manual/Template, Mounting Screws, Weathertight Connector
IMAGE			
Max. Resolution	2688 x 1520		
Frame Rate	20FPS @ 2688 x 1520, 30FPS @ 1920 x 1080, 30FPS @ 1280 x 720		
Image Setting	Brightness, Contrast, Saturation, Sharpness, Hue, AGC Gain, Image Rotation/Mirror, 50/60Hz System, Text Overlay (Name, Time/Date, Fixed Labels; Adjustable for Position, Size, Color; etc., Privacy Masking Support		
BLC			
ROI Codec	Support Up to 4 User Defined Areas		
ACCESSORIES			
Junction Box JB125		Pole Mount POLEMT5	
			



RainVision

www.rainvision.com ♦ 1 Enterprise Place Hicksville NY 11801 ♦ (516) 933-4900