



IPHVD3-2812-W

3MP OUTDOOR IR DAY/NIGHT
DOME IP CAMERA

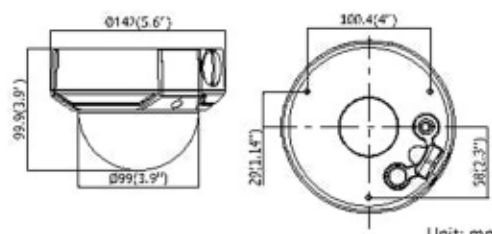


FEATURES

- 20FPS @ 3MP (2048 x 1536)
- 2.8-12mm Varifocal Lens
- H.264 / MJPEG
- IR Range up to 65'
- DWDR, DNR, Day/Night
- Outdoor IP66, Vandal-proof
- 12VDC, PoE
- Available in White

Rainvision is a leading brand of HD and IP network video surveillance cameras and recording equipment. By utilizing the latest technology in the industry, Rainvision video surveillance cameras provide all of the crisp, clear image quality in any security application or environment. With incorporating the latest ONVIF Profile S standards, Rainvision allows for easy integration and interoperability.

SPECIFICATIONS

CAMERA		NETWORK	
Image Sensor	1/3" Progressive Scan CMOS	Network Storage	micro SD/SDHC/SDXC card (64GB) local storage, NAS
Min. Illumination	0.07 Lux @ F1.2, AGC ON, 0 Lux with IR	Alarm Trigger	Motion Detection, Tampering Alarm, Network Disconnect, IP Address Conflict, HDD full, HDD error
Shutter Speed	1/25s (1/30s) to 1/100,000s	Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
Lens	2.8-12mm Varifocal	General Standard Interface	User Authentication, Watermark, Dual Stream ONVIF, PSIA, CGI, ISAPI
Lens Mount	Φ14	GENERAL	1 RJ45 10M / 100M Ethernet Interface
Day & Night	IR cut filter	Operating Conditions	-22 °F ~ 140 °F, Humidity 95% or less (non-condensing)
IR Range	65'	Power Requirement	DC12V ± 10%, PoE (802.3af)
DNR	3D DNR	Power Consumption	Max. 5.5W (Max. 7.5W with IR on)
WDR	Digital WDR	Ingress Protection	IP66
3-axis Angle Adjustment	Pan: 0°~355°, Tilt: 0°~75°, Rotation: 0°~355°	Dimensions	Φ5.51" x 3.94"
COMPRESSION STANDARD		Weight	2.3 lbs
Video Compression	H.264 / MJPEG	Warranty	3 Years
Type	Main Profile H.264	Package Contents	Camera, Installation CD/Manual/Template, Electrical Box Adaptor Plate, Mounting Screws, Weathertight Connector, Service Monitor Cable
Video Bit Rate	32 Kbps ~ 16 Mbps		
Dual Streams	Support		
Audio Compression	G.711 / G.726 / MP2L2		
Audio Bit Rate	64 Kbps (G.711) / 16 Kbps (G.726) / 32-128 Kbps (MP2L2)		
IMAGE			
Max. Resolution	2048 x 1536		
Frame Rate	50Hz: 20FPS @ 2048 x 1536, 25FPS @ 1920 x 1080, 25FPS @ 1280 x 720, 60Hz: 20FPS @ 2048 x 1536, 30FPS @ 1920 x 1080, 30FPS @ 1280x720		
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness Adjustable by Client Software or Web Browser		
BLC	Support, Zone Configurable		
ROI Codec	Support, Up to 4 Configurable Areas		
ACCESSORIES			
Junction Box JB300	Wall Mount WM310BB with Junction Box	Pole Mount POLEMT5	
			



RainVision

www.rainvision.com ♦ 1 Enterprise Place Hicksville NY 11801 ♦ (516) 933-4900