



IPHBLX8-3-W

8MP (4K) OUTDOOR IR WDR DAY/NIGHT
BULLET IP CAMERA

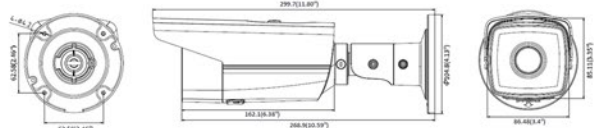


FEATURES

- 15FPS @ 8MP (3840 x 2160)
- 2.8mm Fixed Lens
- H.265 / H.264
- IR Range up to 165'
- WDR, DNR, Day/Night
- Outdoor IP67
- 12VDC, PoE
- Available in White

Rainvision is a leading brand of HD and IP network video surveillance cameras and recording equipment. By utilizing the latest technology in the industry, Rainvision video surveillance cameras provide all of the crisp, clear image quality in any security application or environment. With incorporating the latest ONVIF Profile S standards, Rainvision allows for easy integration and interoperability.

SPECIFICATIONS

CAMERA		NETWORK	
Image Sensor	1/2.5" Progressive Scan CMOS	Network Storage	micro SD/SDHC/SDXC Card (128GB) Local Storage, NAS (NFS, SMB, CIFS), ANR
Min. Illumination	0.01Lux @ F1.2, AGC ON, 0 Lux with IR	Alarm Trigger	Motion Detection, Tampering Alarm, Network Disconnect, IP Address Conflict, Illegal Login, HDD full, HDD error
Shutter Speed	1/3s to 1/100,000s	Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6
Lens	2.8mm, Horizontal Field of View: 102°	General	One-key Reset, Anti-Flicker, Heartbeat, Mirror, Password Protection, Privacy Mask, Watermark, IP Address Filter
Lens Mount	M12	Standard Interface	ONVIF (Profile S, Profile G), PSIA, CGI, ISAPI
Day & Night	IR Cut Filter		1 RJ45 10M / 100M Self Adaptive Ethernet Interface
IR Range	165'		
DNR	3D DNR		
WDR	120dB		
3-axis Angle Adjustment	Pan: 0°~360°, Tilt: 0°~100°, Rotation: 0°~360°		
COMPRESSION STANDARD		GENERAL	
Video Compression	H.265 / H.264	Operating Conditions	-22 °F ~ 140 °F, Humidity 95% or less (non-condensing)
Type	Main Profile H.265 / H.264	Power Requirement	DC12V ± 25%, PoE (802.3af 42.5 – 57 V, class 3)
Video Bit Rate	32 Kbps ~ 16 Mbps	Power Consumption	12VDC: 5W, PoE: 9.5W
Triple streams	Support	Ingress Protection	IP67
IMAGE		Dimensions	Φ4.13" x 11.8"
Max. Resolution	3840 x 2160	Weight	2.65 lbs
Frame Rate	50Hz: 15FPS @ 3840 x 2160, 25FPS @ 2560 x 1920, 25FPS @ 2560 x 1440, 25FPS @ 1920 x 1080, 25FPS @ 1280 x 720, 60Hz: 15FPS @ 3840 x 2160, 30FPS @ 2560 x 1920, 30FPS @ 2560 x 1440, 30FPS @ 1920 x 1080, 30FPS @ 1280 x 720	Warranty	3 Years
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness Adjustable by Client Software or Web Browser	Package Contents	Camera, Installation CD/Manual/Template, Mounting Screws, Weathertight Connector
BLC	Support		
ROI Codec	Support, 1 Fixed Region for Mainstream and Substream Separately		
ACCESSORIES			
Junction Box JB150	Junction Box JB200	Pole Mount POLEMT5	
			



RainVision

www.rainvision.com ♦ 800 Shames Drive Westbury NY 11590 ♦ (516) 933-4900