



IPHEBX8-4-W

8MP (4K) OUTDOOR IR WDR DAY/NIGHT
EYEBALL IP CAMERA

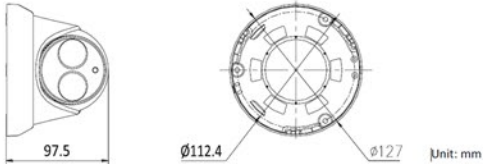


FEATURES

- 15FPS @ 8MP (3840 x 2160)
- 4mm Fixed Lens
- H.265 / H.264
- IR Range up to 100'
- WDR, DNR, Day/Night
- Outdoor IP67, Vandal-proof
- 12VDC, PoE
- Available in White

Rainvision is a leading brand of HD and IP network video surveillance cameras and recording equipment. By utilizing the latest technology in the industry, Rainvision video surveillance cameras provide all of the crisp, clear image quality in any security application or environment. With incorporating the latest ONVIF Profile S standards, Rainvision allows for easy integration and interoperability.

SPECIFICATIONS

CAMERA		NETWORK	
Image Sensor	1/2.5" Progressive Scan CMOS	Network Storage	micro SD/SDHC/SDXC card (128G) local storage, NAS (NFS,SMB/CIFS), ANR
Min. Illumination	0.01Lux @ F1.2, AGC ON, 0 Lux with IR	Alarm Trigger	Motion Detection, Tampering Alarm, Network Disconnect, IP Address Conflict, Illegal Login, HDD full, HDD error
Shutter Speed	1/3s to 1/100,000s	Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6
Lens	4mm	General	One-key Reset, Dual-VCA, Anti-flicker, Heartbeat, Mirror, Password Protection, Privacy Mask, Watermark, IP Address Filter
Lens Mount	M12	Standard Interface	ONVIF (Profile S, Profile G), PSIA, CGI, ISAPI
Day & Night	IR cut filter with auto switch		1 RJ45 10M / 100M Self Adaptive Ethernet Interface
IR Range	100'		
DNR	3D DNR		
WDR	120dB		
3-axis Angle Adjustment	Pan: 0°~360°, Tilt: 0°~75°, Rotation: 0°~360°		
COMPRESSION STANDARD		GENERAL	
Video Compression	H.265 / H.264	Operating Conditions	-22 °F ~ 140 °F, Humidity 95% or less (non-condensing)
Type	Main Profile H.265 / H.264	Power Requirement	DC12V ± 25%, PoE (802.3af)
Video Bit Rate	32 Kbps ~ 16 Mbps	Power Consumption	Max. 5.5W (Max. 7.5W with IR on)
Triple streams	Support	Ingress Protection	IP67
IMAGE		Dimensions	5.0" x 3.8"
Max. Resolution	3840 x 2160	Weight	1.5 lbs
Frame Rate	50Hz: 15FPS @ 3840 x 2160, 25FPS @ 2560 x 1920, 25FPS @ 2560 x 1440, 25FPS @ 1920 x 1080, 25FPS @ 1280 x 720, 60Hz: 15FPS @ 3840 x 2160, 30FPS @ 2560 x 1920, 30FPS @ 2560 x 1440, 30FPS @ 1920 x 1080, 30FPS @ 1280x720	Warranty	3 Years
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness Adjustable by Client Software or Web Browser	Package Contents	Camera, Installation CD/Manual/Template, Mounting Screws, Weathertight Connector
BLC	Support, Zone configurable		
ROI Codec	Support		
ACCESSORIES			
Junction Box JB210	Wall Mount WM315	Pole Mount POLEMT5	
			



RainVision

www.rainvision.com ♦ 800 Shames Drive Westbury NY 11590 ♦ (516) 933-4900