



TVIHD5BL-21M-W

5MP OUTDOOR IR DWDR DAY/NIGHT
BULLET HD-TVI CAMERA

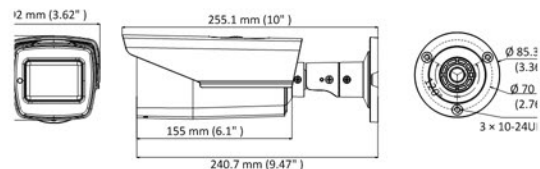


FEATURES

- 5MP (2560 x 1944) Resolution
- 2.7~13.5mm Motorized Lens
- HD-TVI / HD-CVI / AHD / Analog Video Output
- IR Range up to 130'
- DWDR, DNR, Day/Night
- Outdoor IP67
- 12VDC / 24VAC
- Available in White

Rainvision is a leading brand of HD and IP network video surveillance cameras and recording equipment. By utilizing the latest technology in the industry, Rainvision video surveillance cameras provide all of the crisp, clear image quality in any security application or environment. With incorporating the latest ONVIF Profile S standards, Rainvision allows for easy integration and interoperability.

SPECIFICATIONS

CAMERA		GENERAL	
Image Sensor	5MP CMOS Image Sensor	Operating Conditions	-40 °F ~ 140 °F
Min. Illumination	Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR	Power Requirement	Humidity 90% or Less (Non-condensing)
Shutter Speed	PAL: 1/25s to 1/50,000s NTSC: 1/30s to 1/50,000s	Power Consumption	12VDC $\pm$ 15%, 24VAC $\pm$ 15%
Lens	2.7~13.5mm Motorized Varifocal Lens	Ingress Protection	Max. 8.9W
Day & Night	IR Cut Filter	Dimensions	IP67
IR Range	130'	Weight	10" x 3.62" x 3.33"
DNR	2D DNR	Warranty	1.55 lbs
DWDR	Supported	Package Contents	3 Years
3-axis Adjustment	Pan: 0°~360°, Tilt: 0°~90°, Rotate: 0°~360°		Camera, Installation Manual/Template, Installation Accessories
Horizontal Field of View	95.7°~29.1°		
Synchronization	Internal Synchronization		
Communication	Up the Coax, HD-TVI Output		
IMAGE			
Max. Resolution	2560 x 1944		
Frame Rate	PAL: 20FPS@ 5MP, 25FPS @ 4MP, 25FPS @ 1080p, NTSC: 20FPS @ 5MP, 30FPS @ 4MP, 30FPS @ 1080p		
Image Settings	Brightness, Sharpness, DNR, Mirror, Smart IR		
BLC	Support		
AGC	Support		
D/N Mode	Auto / Color / Black and White		
White Balance	ATW / MWB		
ACCESSORIES			
Junction Box JB150	Pole Mount POLEMT5		
			



RainVision

www.rainvision.com ♦ 1 Enterprise Place Hicksville NY 11801 ♦ (516) 933-4900