

IPH3EBX4-3-W

4MP OUTDOOR IR DAY/NIGHT
EYEBALL IP CAMERA

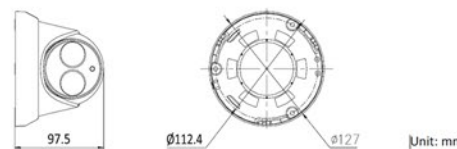


FEATURES

- 30FPS @ 4MP (2688 x 1520)
- 2.8mm Fixed Lens
- H.265+ / H.265 / H.264+ / H.264
- IR Range up to 100'
- WDR, DNR, Day/Night
- Outdoor IP67
- 12VDC, PoE
- Available in White

Rainvision is a leading brand of HD and IP network video surveillance cameras and recording equipment. By utilizing the latest technology in the industry, Rainvision video surveillance cameras provide all of the crisp, clear image quality in any security application or environment. With incorporating the latest ONVIF Profile S standards, Rainvision allows for easy integration and interoperability.

SPECIFICATIONS

CAMERA		NETWORK	
Image Sensor	1/3" Progressive Scan CMOS	Network Storage	Support Micro SD/SDHC/SDXC Card (128G), Local Storage and NAS(NFS,SMB/CIFS), ANR
Min. Illumination	Color: 0.005 Lux @ (F1.6, AGC ON), 0 Lux with IR on	Alarm Trigger	Motion detection, Video Tampering, Network Disconnected, IP Address Conflict, Illegal Login, HDD Full, HDD Error
Shutter Speed	1/3s to 1/100,000s	Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
Lens	Fixed 2.8mm	General	One-key Reset, Anti-flicker, Three Streams, Heartbeat, Mirror, Password Protection, Privacy Mask, Watermark, IP Address Filter
Angle of View	103° Horizontal, 55° Vertical, 122° Diagonal	Standard Interface	ONVIF (PROFILE S, PROFILE G), ISAPI
Day & Night	IR Cut Filter		1 RJ45 10M / 100M Self-adaptive Ethernet Interface
IR Range	100'	GENERAL	
DNR	3D DNR	Operating Conditions	-22 °F ~ 140 °F, Humidity 95% or less (non-condensing)
WDR	120dB	Power Requirement	DC12V ± 15%, PoE (802.3af, Class 3)
3-axis Angle Adjustment	Pan: 0°~360°, Tilt: 0°~75°, Rotation: 0°~360°	Power Consumption	12 VDC, 0.5A, Max. 6W, PoE (802.3af, 37V to 57V), 0.2A to 0.1A, max. 7.5W
COMPRESSION STANDARD		Ingress Protection	IP67, TVS 2000V Lightning Protection, Surge Protection and Voltage Transient Protection
Video Compression	Main stream: H.265/H.264/H.264+/H.265+, Sub-stream: H.265/H.264/MJPEG	Dimensions	5.0" x 3.8"
Video Bit Rate	32 Kbps to 8 Mbps	Weight	1.3 lbs
IMAGE		Warranty	3 Years
Max. Resolution	2688 x 1520	Package Contents	Camera, Installation CD/Manual/Template, Mounting Screws, Weathertight Connector
Frame Rate	50Hz:: 25fps (2688 x 1520, 2560 x 1440, 2304 x 1296, 1920 x 1080), 60Hz: 30fps (2688 x 1520, 2560 x 1440, 2304 x 1296, 1920 x 1080)		
Image Setting	Rotate mode, Saturation, Brightness, Contrast, Sharpness Adjustable by Client Software or Web Browser		
BLC	Support		
ROI Codec	Support		
ACCESSORIES			
Junction Box JB210	Wall Mount WM315	Pole Mount POLEMT5	
			