

IPHEBX8-3-WL-W

8MP OUTDOOR WHITE LIGHT DAY/NIGHT EYEBALL IP CAMERA

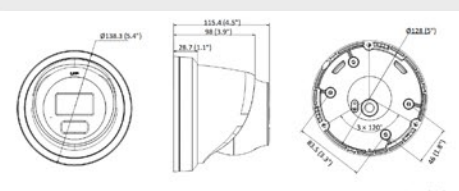


FEATURES

- 20FPS @ 8MP (3840 x 2160)
- 2.8mm Fixed Lens
- H.265+ / H.265 / H.264+ / H.264
- White Light Range up to 100'
- WDR, 3D DNR, Day/Night
- Built-in Microphone for Real-time Audio Security
- Outdoor IP67
- 12VDC, PoE
- Available in White

Rainvision is a leading brand of HD and IP network video surveillance cameras and recording equipment. By utilizing the latest technology in the industry, Rainvision video surveillance cameras provide all of the crisp, clear image quality in any security application or environment. With incorporating the latest ONVIF Profile S standards, Rainvision allows for easy integration and interoperability.

SPECIFICATIONS

CAMERA		NETWORK	
Image Sensor	1/1.8" Progressive Scan CMOS	Network Storage	Support Micro SD/SDHC/SDXC Card (256G), Local Storage and NAS(NFS,SMB/CIFS), ANR
Min. Illumination	Color: 0.0008 Lux @ (F1.0, AGC ON), 0 Lux with White Light on	Alarm Trigger	Motion detection (human and vehicle targets classification), video tampering alarm, exception
Shutter Speed	1/3s to 1/100,000s	Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, NTP, UPnP, SMTP, IGMP, 802.1X, QoS, IPv6, UDP, Bonjour, SSL/TLS, PPPoE, SNMP
Lens	Fixed 2.8mm	General Function	Anti-flicker, Heartbeat, Mirror, Privacy Mask, Flash Log, Password Reset via email, Pixel Counter, Password Protection, One-key Reset, Three Streams
Angle of View	102° Horizontal, 54° Vertical, 121° Diagonal	API	ONVIF (PROFILE S, PROFILE G, PROFILE T), ISAPI, SDK, ISUP
Day & Night	IR Cut Filter	Interface	1 RJ45 10M / 100M Self-adaptive Ethernet Interface
White Light Range	100'	GENERAL	
DNR	3D DNR	Operating Conditions	-22°F~140°F, Humidity 95% or less (non-condensing)
WDR	130dB	Power Requirement	DC12V ± 15%, PoE (802.3af, Class 3)
3-axis Angle Adjustment	Pan: 0°~360°, Tilt: 0°~75°, Rotation: 0°~360°	Power Consumption	12 VDC ± 25%, reverse polarity protection PoE: 802.3af, Class 3
COMPRESSION STANDARD		Ingress Protection	IP67, TVS 2000V Lightning Protection, Surge Protection and Voltage Transient Protection
Video Compression	Main stream: H.265+/H.265/H.264+/H.264 Sub-stream: H.265/H.264/MJPEG Third stream: H.265/H.264	Dimensions	Ø 5.4" x 4.5"
Video Bit Rate	32 Kbps to 16 Mbps	Weight	1.7 lbs
Audio Compression	G.711ulaw / G.711alaw / G.722.1 / G.726 / MP2L2 / PCM / MP3 / AAC-LC	Warranty	3 Years
Audio Bit Rate	64 Kbps (G.711ulaw/G.711alaw) / 16 Kbps (G.722.1) / 16 Kbps (G.726) / 32 to 192 Kbps (MP2L2) / 8 to 320 Kbps (MP3) / 16 to 64 Kbps (AAC-LC)	Package Contents	Camera, Installation CD/Manual/Template, Mounting Screws, Weathertight Connector
IMAGE			
Max. Resolution	3840 x 2160		
Frame Rate	50 Hz: 20 fps (3840 x 2160) 25 fps (3200 x 1800, 2688 x 1520, 1920 x 1080, 1280 x 720) 60 Hz: 20 fps (3840 x 2160) 30 fps (3200 x 1800, 2688 x 1520, 1920 x 1080, 1280 x 720)		
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness Adjustable by Client Software or Web Browser		
BLC	Supported		
ROI Codec	1 Fixed Region for Main Stream and Sub-stream		